



BoFloor - Specialist in **high-quality synthetic floor systems** for both professional and private use.


www.bofloor.nl



FITNESS

PaviFLEX Fitness es un suelo excepcional para áreas fitness en general, cardio y ciclo indoor.
PaviFLEX Fitness is exceptional flooring for standard fitness areas with cardio and indoor cycling.

COLORES / COLOURS

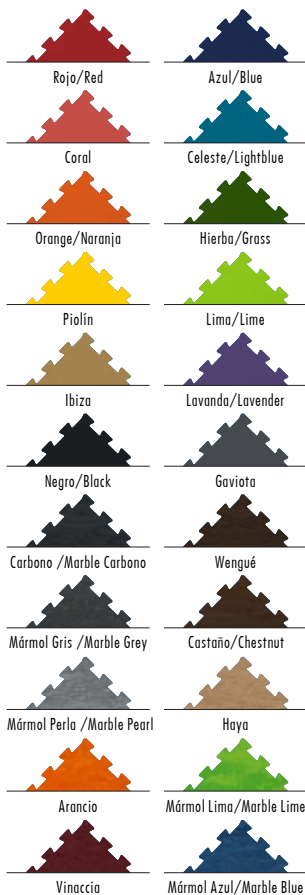

Consulta para colores personalizados / Ask for custom colours.
Ver listado completo en la web / Full Color Swatch on web.
Los colores sólidos pueden tener una ligera variación de tono.
Solid colors may have a slight tonality variation.




ESPECIFICACIONES TÉCNICAS / TECHNICAL SPECIFICATIONS

MATERIAL: Goma 100% virgen / Virgin Rubber
INSTALACIÓN / INSTALLATION: Puzzle sin encolar / Interlocking no glue
ACABADO / FINISH: 4 lados puzzle / 4 side puzzle tiles
GROSOR / THICKNESS: 5 mm
SUPERFICIE LOSA / SIZE SHEET: 100x100 cm
PESO / WEIGHT: 7,5 kg/m ²
TRATAMIENTO SUPERFICIE: Impermeable y anti bacteriana
SURFACE TREATMENT: Waterproof & Non Bacteria
DENSIDAD / DENSITY: UNE 53526 1460 kg/m ³
DUREZA / HARDNESS: UNE 53130 DUREZA/ShoreA 70 ±5
RES. ABRASIÓN / ABRASION RES: UNE 53527 <380 mm ³
COEFICIENTE DE FRICCIÓN: EN 13036-4: ÓPTIMO (75-110)
SLIP RESISTANCE: EN 13036-4: OPTIMUM (75-110)
RES. AL IMPACTO / RES. TO IMPACT: EN 1517 <0,5 mm
COMPRESIÓN / COMPRESSION SET: UNE53511 (30 min) 27%
COMPRESIÓN / COMPRESSION SET: UNE53510 (24 h) 11%
RESISTENCIA AL FUEGO / FIRE REACTION: ES 13501-1 Cfl-s2
ABSORCIÓN AGUA / WATER ABSORP: ASTM D570 0%
DILATACIÓN / DILATATION: 0-40°C : 3,2 · 10 ⁻⁵ °C ⁻¹
PAH: Norm AfPS GS 2014:01 PAK... PASS
AISLAMIENTO ACÚSTICO / ACOUSTIC ISOLATION: ISO 10140: >15,5 dB

Compuesto por goma 100% virgen de alta densidad con excelente durabilidad y calidad. Gracias al novedoso sistema de prensado ideado por PaviFLEX, obtenemos la densidad adecuada y una mayor resistencia del pavimento, para no marcar las huellas de los equipos ligeros, pesas, kettlebells, mancuernas y reducir la vibración y el ruido de los equipos.

Made with 100% virgin rubber of the highest quality, it is a long lasting floor, resistant and flexible at the same time. Thanks to PaviFLEX newest vulcanization process, Fitness is produced with the right properties to support the cardio equipment, decrease the vibrations and reduce the noise of dumbbells.



DESCRIPCIÓN TÉCNICA/TECHNICAL DESCRIPTION

DESCRIPCIÓN Description	ESPESOR Thickness	DIMENSIONES Size
A Losa /Tile	5 mm	100x100 cm
B Perfil /Edge	5 mm	100x12 cm
C Esquina /Corner	5 mm	12x12 cm



